

Delta VFD-L Series Sub-Fractional General Purpose Drive



- Voltage Range:**
- 1 Phase 110V Series : 200W~400W
 - 1 Phase 230V Series : 200W~0.75KW (200W~1HP)
 - 3 Phase 230V Series : 200W~1.5KW (200W~2HP)




VFD-L series have been approved by CE and UL.

www.delta.com.tw/industrialautomation



Function Display



Wiring




NOTE: Do not plug in a Modem or telephone line to the RS-485 communication port, component damage may result. Terminals 1 & 2 are the power source for the external stop inverter and should not be wired using RS-485 communication.

*If the AC Drive model is VF032L11A/B, VF034L11A/B, VF032L21B, VF034L21B or VF020L21B, please use power terminals RL1 and RL2.

*If the AC Drive model is VF032L21A, VF034L21A or VF020L21A, 3 phase power may be used on RL1, RL2, TL3.

*If the AC Drive model is VF031B,23A, single phase power is not recommended.

Dimensions



		Voltage Class		115V		230V	
Model Number VFD-□□□□□□□□A/B		002	004	002	004	007	015
Applicable Motor Output (KW)		0.2	0.4	0.2	0.4	0.7	1.5
Rated Output Capacity (KVA)		0.6	1.0	0.6	1.0	1.6	2.7
Rated Output Current (A)		1.6	2.5	1.6	2.5	4.2	7.0
Output Rating	Max. Output Voltage (V)	3phase double the input voltage		Proportional to input voltage			
Rated Frequency (Hz)		1.0~400Hz					
Rated Input Current (A)		6	9	4.9/1.9	6.5/2.7	9.7/5.1	*/9
Power	Input Voltage Tolerance	Single phase 100~120V 50/60Hz		Single / 3-phase 200~240V 50/60Hz		3-phase 200~240V 50/60Hz	
Frequency Tolerance		±5%					
Control Characteristics	Control System	SVPWM (Space Vector Pulse Width Modulation, carrier frequency 3kHz~10kHz)					
Output Frequency Resolution		0.1Hz					
Torque Characteristics		Including auto-torque and auto-slip compensation, the starting torque is 150% at 5Hz					
Overload Endurance		150% of rated current for 1 minute					
Accel/Decel Time		0.1~600Sec. (can be set individually)					
V/F Pattern		Adjustable V/f curve					
Stall Prevention Level		20~200% of rated output current					
Frequency Setting		Keypad	Setting by ▲ ▼ keys or potentiometer				
Operation Setting		Keypad	RUN/STOP keys				
Operating Characteristics	Signal	External Signal	M0, M1, M2, M3 can be combined to offer various modes of operation, RS-485 communication port				
Multi-function Input Signal		Multi-step speed selection 0 to 3, Jog, accel/decel inhibit, first/second accel/decel selector, counter, PLC operation, external base block (NC, NO) selection					
Multi-function Output Signal		AC Drive Operating, Frequency Attained, Non-zero speed, Base Block, Fault indication, Local/Remote control indication, PLC Operation indication.					
Other Function	AVR, S-curve, Over-Voltage Stall Prevention, DC Braking, Fault Records, Adjustable Carrier Frequency, Over-Current Stall Prevention, Momentary Power Loss restart, Reverse Inhibit, Frequency Limits, Parameter Lock/Reset						
Protection	Over Voltage, Over Current, Under Voltage, Overload, Overheating, Self-testing, Ground fault						
Other	Built-in EMI Filter for Frame B (single phase)						
Cooling	Forced air-cooling						
Environment	Installation Location	Altitude 1,000 m or below, keep from corrosive gasses, liquid and dust					
Ambient Temperature		-10° C to +40° C (Non-Condensing and not frozen)					
Storage Temperature		-20° C to +60° C					
Ambient Humidity		Below 90%RH (non-condensing)					
Vibration		9.80665m/s ² (1G) less than 20Hz, 5.88m/s ² (0.6Gat) 20 to 50Hz					

*We reserve the right of this catalogue contained information change without prior notice.

Features:

- 1.16-bit microprocessor controlled SVPWM output.
- 2.Low noise ; carrier frequency up to 10kHz.
- 3.Controlled reversing.
- 4.2 inputs and 1 output terminal for external controls.
- 5.Adjustable V/F curve.
- 6.Adjustable accel / decel time.
- 7.RS-485 communication (Baud rate 9600).
- 8.Option: Programmable Keypad (VFD-PU02).



Suitable for under 100W/3-phase AC motor drive


Function Display




Installation Method




Wiring



Dimensions

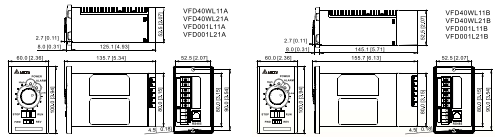

Installation Dimensions



Compact with VFD-PU02 for running and monitoring AC motor drive (Optional)



Built-in Modbus Communication



Control Terminal Wiring

Motor Terminal Wiring

	115V		230V	
Voltage	115V		230V	
Model Number VFD-□□□□ LK1A/B	40W	001	40W	001
Max. Applicable Motor Output(w)	25/40	60/100	25/40	60/100
Output Rating	Rated Output Capacity (VA)	106/152	212/303	106/152 212/303
	Rated Output Current (A)	0.28/0.4	0.56/0.8	0.28/0.4 0.56/0.8
Input Rating	Max. Output Voltage (V)	3Phase Double the Input Voltage		Proportional to Input Voltage
	Rated Frequency (Hz)	1.00 to 120.00 Hz		
Control Characteristics	Rated Voltage/Frequency	Single-phase 100 to 125 VAC, 50/60 Hz		Single-phase 200 to 240 VAC, 50/60 Hz
	Voltage/Freq. Tolerance	Voltage:±10%, Frequency:±5%		
Operating Characteristics	Rated Current (A)	1.1A	1.5A	2.2A 3.0A 0.5A 0.7A 1.0A 1.4A
	Control Systems	SVPWM (Space Vector Pulse Width Modulation, carrier frequency 10kHz)		
Environment	Torque Setting	High/Low, Switching		
	Overload Endurance	150% of rated current for 1 minute		
Other	Accel/Decel Time	0 to 30.0 seconds		
	Frequency Setting	Potentiometer		
Protection	Operation Setting Signal	Panel	RUN/STOP, FORWARD/REVERSE	
	Output Indication	Ext. Terminal	RUN/STOP, FORWARD/REVERSE, RS-485	
Cooling	Panel	Fault Indication (LED Flash)		
	Ext. Terminal	Fault Indication (Open Collector)		
Environment	Protection	Self-testing, OverVoltage, OverCurrent, UnderVoltage, Overload, Overheating, Electronic thermal		
	Other	EMI Filter Built in for Frame B		
Environment	Cooling	Natural air-cooling		
	Installation Location	Altitude 1,000 m or lower, keep from corrosive gasses, liquid and dust		
Environment	Ambient Temperature	-10°C TO 40°C (Non-Condensing and not frozen)		
	Storage Temperature	-20°C TO 60°C		
Environment	Ambient Humidity	Below 90% RH (non-condensing)		
	Vibration	0.0600mm/s (1G) less than 20Hz, 6.00mm/s (0.6G) at 20 to 60Hz		

*We reserve the right of this catalogue contained information change without prior notice.